

FastBT

NEW! BoltTensioner series

Small and lightweight

Fits onto all flanges, even with tight geometric constraints

Powerful

Capable of tensioning 10.9-grade bolts up to their yield stress

Easy to operate

Continuous operation enabled by two included batteries




Available for threads from M30 (1 3/16") to M100 (4")

Other configurations available!

No hoses – No external pumps – No heavy boxes – No hassle!


Swivel-mounted pump

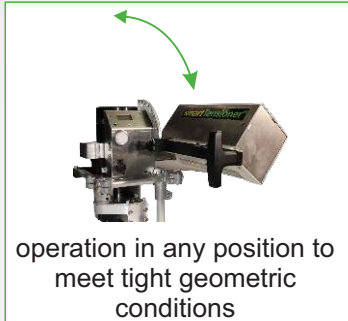

Easy operation



Durable controls / heavy duty design

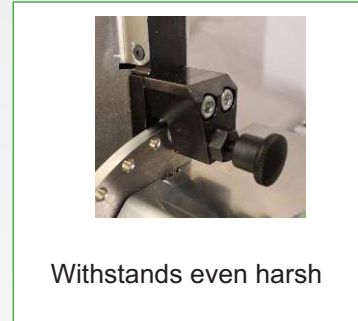

Nut adapter



Comfortable handle



Battery driven



Bolt thread size	Outer diameter [mm]	Height [mm]	Force [kN]	Mass [kg]
M30	76	190	467	9
M33	82	212	571	10
M36	88	235	679	12
M39	96	249	812	14
M42	102	261	932	15
M45	109	280	1090	18
M48	116	301	1227	20
M52	125	320	1459	24
M56	132	332	1683	29
M60	140	347	1960	34
M64	151	366	2255	38
M68	162	385	2560	42
M72	175	401	2892	48

No hoses – No external pumps – No heavy boxes – No hassle!